


## TECHNICAL INFORMATION – HYDRALITE 60 TONNE

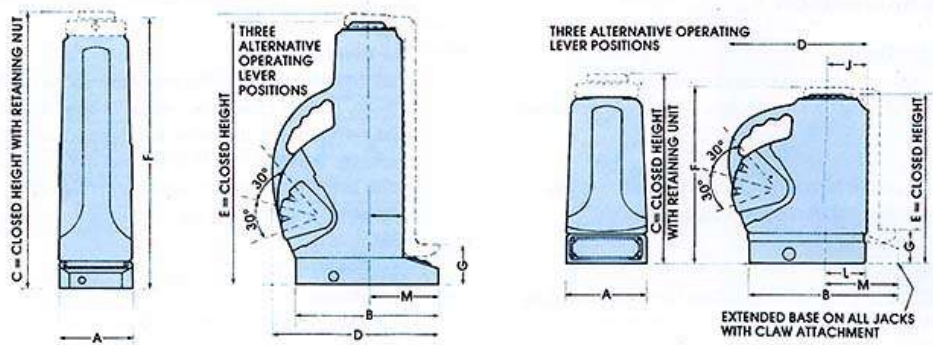

<b>Capacity (tonne)</b>	<b>60</b>	<b>60</b>
<b>Stroke (mm)</b>	152	305
<b>Dimensions (mm)</b>		
A	190	190
B1	251	
B	339	339
C	330	536
D	286	384
E	293	500
F	327	73
G	73	92
J	92	
L	92	181
M	181	108
<b>Specifications</b>		
Claw Capacity (tonne)	24	24
Ram Diameter (mm)	108	108
Jack Weight (kgs)	27.4	43.7
Claw Weight (kgs)	15.7	21.2
Max effort on Lever (kgs)	52	52
Lift / Stroke (mm)	0.3	0.3
Oil Capacity (litres)	1.71	2.84

<b>Code</b>	<b>Description</b>
PS660	Plain
PS660S	Screwed Ram
PS660C	Claw Attachment
PS1260	Plain (with claw base)
PS1260S	Screwed Ram (with claw base)
PS1260C	Claw Attachment